

MOTIV trailers

Technical Information

This trailer design has been manufactured by Motiv Trailers since 1995 to supply a trailer that is suitable for Scissor Lifts and Niftylift HR12 machine (certain models may be over weight).

Popular with end users and hire companies. Huge payload and a very compact trailer for easy use and storage. The low floor height and width adjustable hinged ramps are very safe to use. With the addition of a third central ramp it will carry two small scissor platforms side by side.

A Skeletal version (SK3000) of this model is also available for situations where the Niftylift HR12 is the only machine to be carried

All trailers are compliant with new trailer type approval regulations

Standard Features


- Floor height for loading only 350mm high
- Heavy duty rubber suspension axles
- Fully galvanised steel chassis
- Easy to use 1500mm long hinged aluminium ramps with "wedge" feature so no additional prop stands needed. NEW Laser cut out design for maximum strength. Loading angle of ramps only 12 degrees.
- Aluminium Planked floor
- 6 internal heavy duty lashing rings
- Rope hooks
- Full road lighting in protective brackets including reverse lamps, 13pin plug
- Industrial quality coupling fitted (ball or eye)
- Heavy duty jockey wheel with safety chain
- 250mm auto-reverse brakes on all wheels
- Deck height unladen 390mm (15.5")
- Locking hitch (ball type only)
- Polyethylene lightweight mudguards
- Chassis fitted with receiver sockets for the winch options. If selected the winches are removable when not in use to keep weight to minimum

Optional Extras

- Central aluminium loading ramp
- Bracket mounted spare wheel
- Ratchet load straps
- LED lighting , (12 & 24 volt)
- Manual winch
- Electric winch kit with either on board or stand alone battery pack

MODEL

Access Platform Transporters TC3000

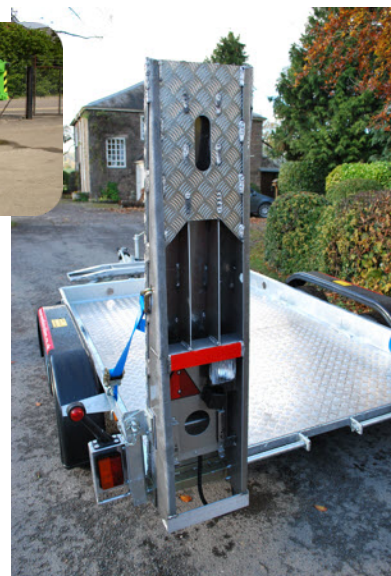

Compatible machine types

TC3000 -25

Niftylift HR12 and Scissor lifts up to 32ft

TC3000 -30

Small diesel Scissor lifts
eg. Snorkel SRT 2770 and General Plant



model	deck size mm	payload	gross weight	wheel size
TC3000 25	2500 x 1800 wide	3000kgs	3500kg	195/50 R13
TC3000 30	3000 x 1800 wide	2940kgs	3500kg	195/50 R13